

Product Features

- Hot pluggable XENPAK form factor
- Wavelength selectable to C-band grid wavelengths
- Hot Pluggable 70-PIN Connector with XAUI Electrical Interface
- SC Duplex Optical Receptacle
- Cooled EA-DFB Laser
- Full duplex transmission mode
- Digital Optics Monitoring
- Management and control via MDIO 2-wire bus
- Power Supply :+5.0V,+3.3V, APS(+1.2V)
- Commercial operating temperature:0°C to +70°C
- Up to 80Km on 9/125μm SMF
- RoHS Compliant



Applications

- 80Km 10G DWDM Network

Descriptions

LX62xxCDR is a high performance and cost effective optical transponder module. It consists of 10.3Gbit/s cooled EML optical transmitter and APD receiver, 4x3.125Gbps Ethernet Signal input XAUI interface, Mux and Demux with clock and data recovery (CDR). Digital diagnostics functions are available via MDIO 2-wire bus, They meet the requirements for 80km 10G DWDM Network and XENPAK MSA Rev 3.0.

LX62xxCDR is compliant with RoHS.

Ordering Information

Table 1. Ordering Information

Part Number	Transmitter	Output Power	Receiver	Sensitivity	Reach	Temp	DDM	RoHS
LX62xxCDR	DWDM EML	-1 ~ +3dBm	APD	< -24.0dBm	80Km	0 ~ 70°C	Available	Compliant

Notes: See Table 2 – Wavelength Guide for “xx” value.

Table 2. Wavelength Guide for “xx” value (100GHz ITU-T channel)

Channel #	Product Part Number	Frequency (THz)	Center Wavelength (nm)
17	LX6217CDR	191.7	1563.86
18	LX6218CDR	191.8	1563.05
19	LX6219CDR	191.9	1562.23
20	LX6220CDR	192.0	1561.42
21	LX6221CDR	192.1	1560.61
22	LX6222CDR	192.2	1559.79



LX62xxCDR
10Gb/s DWDM XENPAK Optical Transponder
10GBASE-ZR 80Km Reach

23	LX6223CDR	192.3	1558.98
24	LX6224CDR	192.4	1558.17
25	LX6225CDR	192.5	1557.36
26	LX6226CDR	192.6	1556.55
27	LX6227CDR	192.7	1555.75
28	LX6228CDR	192.8	1554.94
29	LX6229CDR	192.9	1554.13
30	LX6230CDR	193.0	1553.33
31	LX6231CDR	193.1	1552.52
32	LX6232CDR	193.2	1551.72
33	LX6233CDR	193.3	1550.92
34	LX6234CDR	193.4	1550.12
35	LX6235CDR	193.5	1549.32
36	LX6236CDR	193.6	1548.51
37	LX6237CDR	193.7	1547.72
38	LX6238CDR	193.8	1546.92
39	LX6239CDR	193.9	1546.12
40	LX6240CDR	194.0	1545.32
41	LX6241CDR	194.1	1544.53
42	LX6242CDR	194.2	1543.73
43	LX6243CDR	194.3	1542.94
44	LX6244CDR	194.4	1542.14
45	LX6245CDR	194.5	1541.35
46	LX6246CDR	194.6	1540.56
47	LX6247CDR	194.7	1539.77
48	LX6248CDR	194.8	1538.98
49	LX6249CDR	194.9	1538.19
50	LX6250CDR	195.0	1537.40
51	LX6251CDR	195.1	1536.61
52	LX6252CDR	195.2	1535.82
53	LX6253CDR	195.3	1535.04
54	LX6254CDR	195.4	1534.25
55	LX6255CDR	195.5	1533.47
56	LX6256CDR	195.6	1532.68
57	LX6257CDR	195.7	1531.90
58	LX6258CDR	195.8	1531.12
59	LX6259CDR	195.9	1530.33

60	LX6260CDR	196.0	1529.55
61	LX6261CDR	196.1	1528.77

Electrical Pin Description

Table 3. Electrical Pin Description

Pin	Logic	Symbol	Name/Description
1	-	GND	Electrical Ground
2	-	GND	Electrical Ground
3	-	GND	Electrical Ground
4	-	5.0V	Power Supply
5	I	3.3V	Power Supply
6	I	3.3V	Power Supply
7	I	APS	Adaptive power supply
8	I	APS	Adaptive power supply
9	Open Drain-O	LASI	Link Alarm Status Interrupt. 10-22K Ω resistor pull-up to 1.2V on host Logic High: Normal Operation; Logic low: Link Alarm is indicated
10	Open Drain-I	RESET	Low active Reset input ,10K Ω pull-up inside Transponder Logic High: Normal Operation; Logic low: Reset asserted
11	-	VEND SPECIFIC	Vendor Specific Pin, leave unconnected
12	Open Drain-I	TX ON/OFF	High active Transmitter Enable, 10k Ω pull-up inside Transponder Logic High: Transmitter on ; Logic low: Transmitter off
13	-	RESERVED	Reserved
14	O	MOD DETECT	1K Ω to Ground inside Transponder
15	-	VEND SPECIFIC	Vendor Specific Pin, leave unconnected
16	-	VEND SPECIFIC	Vendor Specific Pin, leave unconnected
17	Open Drain-I/O	MDIO	Management Data I/O. Requires external 10-22K Ω pull-up to 1.2V on host
18	1.2V COMS-I	MDC	Management Clock Input
19	1.2V COMS-I	PRTAD4	Port Address bit 4(low=0)
20	1.2V COMS-I	PRTAD3	Port Address bit 3(low=0)
21	1.2V COMS-I	PRTAD2	Port Address bit 2(low=0)
22	1.2V COMS-I	PRTAD1	Port Address bit 1(low=0)
23	1.2V COMS-I	PRTAD0	Port Address bit 0(low=0)
24	-	VEND SPECIFIC	Vendor Specific Pin, leave unconnected
25	I	APS SET	Feedback input for APS, Input of APS setting resistor
26	-	RESERVED	Reserved
27	O	APS SENSE	APS Sense output for APS control circuit
28	I	APS	Adaptive power supply
29	I	APS	Adaptive power supply
30	I	3.3V	Power Supply

31	I	3.3V	Power Supply
32	-	5.0V	Power Supply
33	-	GND	Electrical Ground
34	-	GND	Electrical Ground
35	-	GND	Electrical Ground
36	-	GND	Electrical Ground
37	-	GND	Electrical Ground
38	-	RESERVED	Reserved
39	-	RESERVED	Reserved
40	-	GND	Electrical Ground
41	O	RX LANE 0+	Module XAUI output lane 0+
42	O	RX LANE 0-	Module XAUI output lane 0-
43		GND	Electrical Ground
44	O	RX LANE 1+	Module XAUI output lane 1+
45	O	RX LANE 1-	Module XAUI output lane 1-
46		GND	Electrical Ground
47	O	RX LANE 2+	Module XAUI output lane 2+
48	O	RX LANE 2-	Module XAUI output lane 2-
49		GND	Electrical Ground
50	O	RX LANE 3+	Module XAUI output lane 3+
51	O	RX LANE 3-	Module XAUI output lane 3-
52		GND	Electrical Ground
53		GND	Electrical Ground
54		GND	Electrical Ground
55	I	TX LANE 0+	Module XAUI Input lane 0+
56	I	TX LANE 0-	Module XAUI Input lane 0-
57		GND	Electrical Ground
58	I	TX LANE 1+	Module XAUI Input lane 1+
59	I	TX LANE 1-	Module XAUI Input lane 1-
60		GND	Electrical Ground
61	I	TX LANE 2+	Module XAUI Input lane 2+
62	I	TX LANE 2-	Module XAUI Input lane 2-
63		GND	Electrical Ground
64	I	TX LANE 3+	Module XAUI Input lane 3+
65	I	TX LANE 3-	Module XAUI Input lane 3-
66		GND	Electrical Ground
67		RESERVED	Reserved
68		RESERVED	Reserved

69	GND	Electrical Ground
70	GND	Electrical Ground

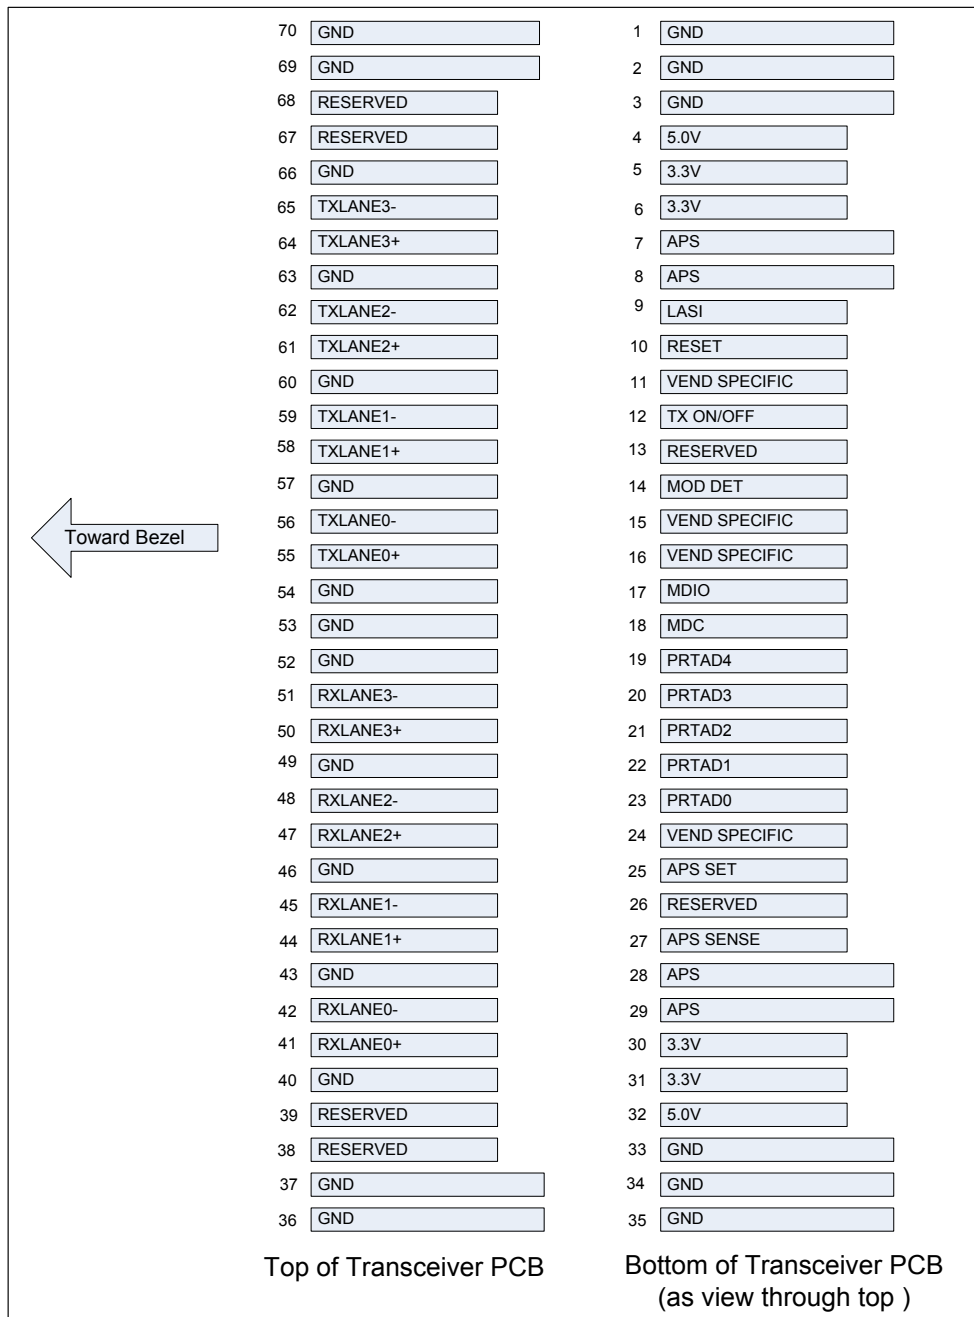


Figure 1. XENPAK Transponder Electrical Pad Layout

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Table 4. Absolute Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Storage Temperature	T _s	-20	85	°C
Supply Voltage 5.0v	V _{CC5}	0	6.0	V
Supply Voltage 3.3v	V _{CC3}	0	4.0	V
Supply Voltage APS	V _{CC5}	0	1.5	V
Average Receive Optical Power	RXP _{max}		-7	dBm

Recommended Operating Conditions

Table 5. Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	T _c	0	25	70	°C
Supply Voltage	V _{CC5}	4.75	5.0	5.25	V
Supply Voltage	V _{CC3}	3.135	3.3	3.465	V
Supply Voltage	V _{aps}	1.152	1.2	1.248	V
Total Power Dissipation	-		-	4.0	W

Transponder Electrical Characteristics

Table 6. Transponder Electrical Characteristics

XAUI I/O	Symbol	Minimum	Typical	Maximum	Unit	Notes
XAUI Data Rate	DR	-	3.125		Gb/s	-
XAUI Baud Rate Tolerance		-100	-	+100	ppm	-
XAUI Eye Mask	According to IEEE 802.3ae					
Output Differential Impedance	Z _{OUT_XAUI}	80	100	120	Ω	
Differential Input Amplitude	V _{in_xaui}	220		1600	mv	1
Differential Output Amplitude	V _{out_xaui}	800		1600	mv	1
Total Jitter	T _{JXAUI}			0.35	UI	2
Deterministic Jitter	D _{JXAUI}			0.37	UI	2
1.2V CMOS I/O						
Output High Voltage	V _{OH}	1	-	-	V	-
Output Low Voltage	V _{OL}	-	-	0.15	V	-
Input High Voltage	V _{IH}	0.84	-	1.5	V	-
Input Low Voltage	V _{IL}	-	-	0.36	V	-
MDIO I/O						
Output High Voltage	V _{OHM}	1.0	-	1.5	V	-
Output Low Voltage	V _{OLM}	-0.3	-	0.2	V	-

Input High Voltage	V_{IHM}	0.84	-	1.5	V
Input Low Voltage	V_{ILM}	-0.3		0.36	V
MDIO Data Hold Time	t_{HOLD}	10			ns
MDIO Data Setup Time	t_{SU}	10			ns
Delay from MDC Rising Edge to MDIO Data Change	t_{DELAY}			300	ns
MDC Clock Rate	f_{MAX}			2.5	MHz

Notes:

1. Internally AC coupled.
2. XAUI Output ,No pre-equalization.

Transmitter Optical Characteristics

Table 7. Transmitter Optical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Operating Data Rate	-	-	10.3125	-	Gb/s	-
Launch Average Optical Power	P_o	-1	-	+3	dBm	1
Center Wavelength Range	λ_c	1528.77	-	1563.86	nm	-
Center Wavelength Spacing	-	-	100	-	GHz	-
Center Wavelength Tolerance	$\Delta\lambda_c$	-100	-	100	pm	
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	EX	9	-	-	dB	-
Dispersion Penalty@1600ps/nm	TDP	-	-	2.0	dB	-
Average Optical Power (Laser Off)	P_{OFF}	-	-	-30	dBm	1
Eye Diagram			IEEE802.3ae Compliant			

Notes:

1. The optical power is launched into 9/125 μ m SMF..

Receiver Optical Characteristics

Table 8. Receiver Optical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Operating Data Rate	-	-	10.3125	-	Gb/s	-
Center Wavelength	λ_c	1528	-	1565	nm	
Receiver Overload (P_{avg})	P_{OL}	-7	-	-	dBm	1
Average sensitivity	S			-24.0	dBm	1
Optical Return Loss	ORL	27	-	-	dB	-

Notes:

1. PRBS 2³¹-1 test pattern, BER<10⁻¹².

Mechanical specifications

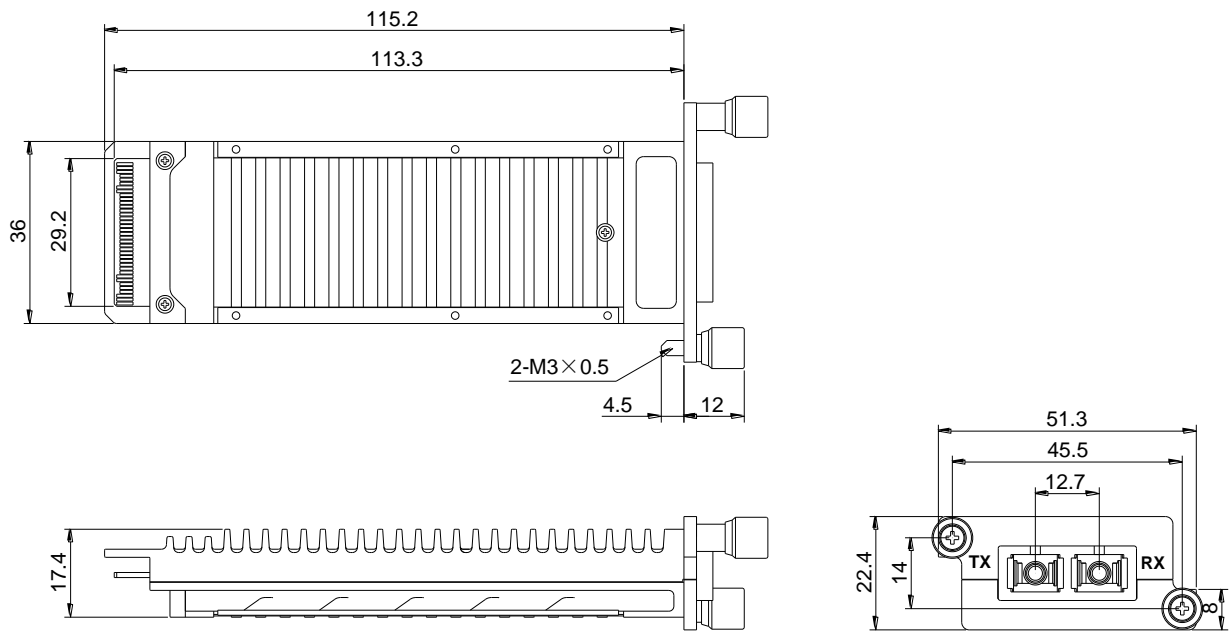


Figure 4. Outline Drawing

For More Information

Linktel Technologies Co., Ltd

sales@linkteltech.com

<http://www.linkteltech.com>



LX62xxCDR
10Gb/s DWDM XENPAK Optical Transponder
10GBASE-ZR 80Km Reach

Linktel China

No.20 University Science Park Road, East-lake Hi-tech Development Zone, Wuhan, 430223, China

Tel: +86 27-87929302

Linktel USA

3311 Ingersoll Court, San Jose, CA 95148

Tel: +1(408)833-9142

linktelus@linkteltech.com